


Accepted Manuscript

Eco design LCA of an innovative lab scale plant for the production of oxygen-enriched air. Comparison between economic and environmental assessment

Federico Galli, Carlo Pirola, Daniele Previtali, Flavio Manenti, Claudia L. Bianchi



PII: S0959-6526(17)32272-2

DOI: [10.1016/j.jclepro.2017.09.268](https://doi.org/10.1016/j.jclepro.2017.09.268)

Reference: JCLP 10773

To appear in: *Journal of Cleaner Production*

Received Date: 26 April 2017

Revised Date: 21 July 2017

Accepted Date: 28 September 2017


Please cite this article as: Galli F, Pirola C, Previtali D, Manenti F, Bianchi CL, Eco design LCA of an innovative lab scale plant for the production of oxygen-enriched air. Comparison between economic and environmental assessment, *Journal of Cleaner Production* (2017), doi: 10.1016/j.jclepro.2017.09.268.

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.


OXYGEN ENRICHED AIR PRODUCTION

[>21 %_{mol} O₂]


1. EXPERIMENTAL DATA

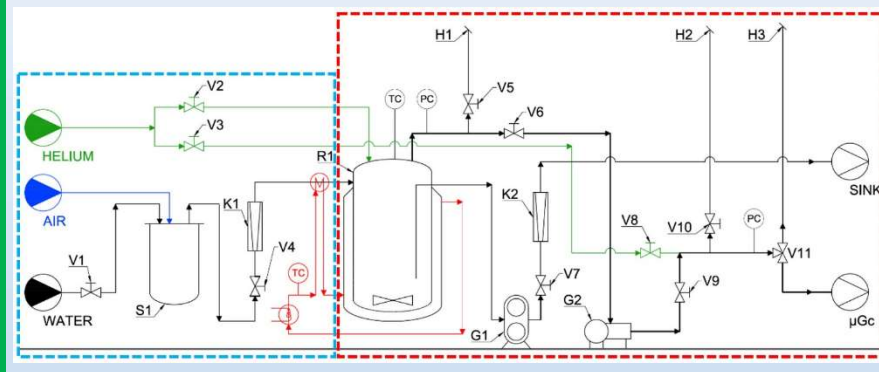

2. LCA AND ECONOMIC ANALYSIS

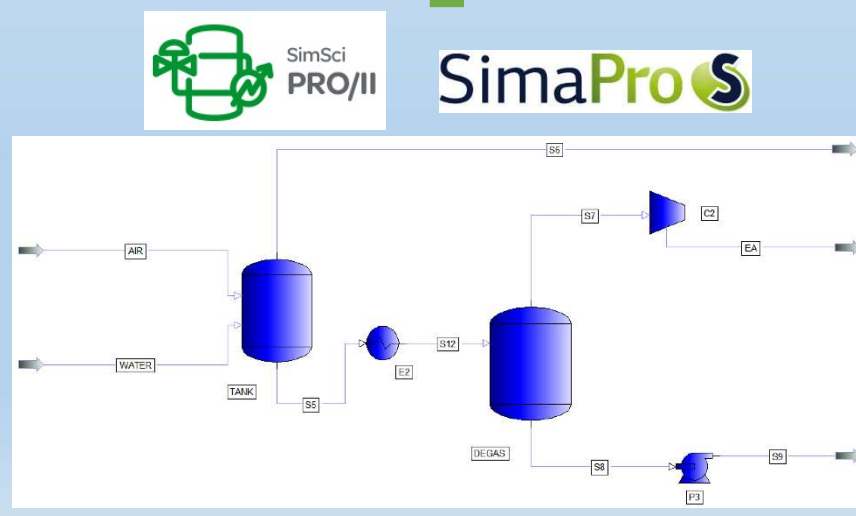

3. MODELING RESULTS

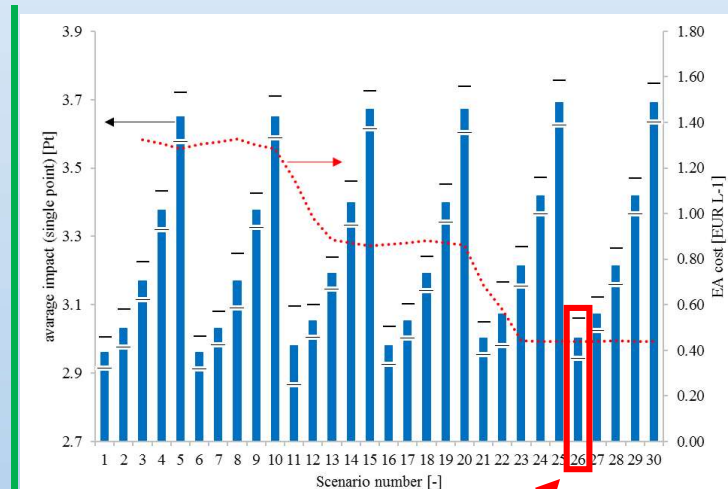

BEST ECO-DESIGN PARAMETERS

Eco-design LCA of an innovative lab-scale plant for the production of oxygen-enriched air. Comparison between economic and environmental assessment

Federico Galli^a, Carlo Pirola^b, Daniele Previtali^b, Flavio Manenti^c, Claudia L. Bianchi^b

^a École Polytechnique de Montréal, Department of Chemical Engineering, Boulevard Edouard Montpetit, H3C 3A7 Montreal, QC, CANADA

^b Università degli Studi di Milano, Dipartimento di Chimica, via Golgi 19, 20133, Milano, ITALY

^c Politecnico di Milano, Dipartimento di Chimica, Materiali e Ingegneria Chimica "Giulio Natta", Piazza Leonardo da Vinci 32, 20133, Milano, ITALY

*corresponding author: federico.galli@polymtl.ca

ABSTRACT

Here we developed an early-stage attributional LCA of an innovative production process of oxygen-enriched air by water desorption. We compared LCA's results with a rigorous economic model, in an eco-design optimization perspective. We developed the life cycle analysis using primary data from the lab-scale plant. We used SimaPro 8.1.1.16 for the LCA analysis and the ReCiPe Endpoint V 1.12 E/A method for the interpretation of the results. The functional unit was the amount of enriched air produced by the plant in 24 hours in Milano (ITALY). A steady state chemical plant simulation software (PRO/II 9.3) calculated the reference flow and we input it in SimaPro with a parametric function. We considered a "cradle-to-grave" analysis. Temperature, pressure and water flowrate were varied to minimize environmental burdens and plant costs. Uncertainty analysis revealed that there is no difference between operating the degassing unit at 20°C or 30°C. SimaPro and PRO/II presented different optimum conditions. However, taken as a whole, we individuated the best process parameters from an eco-economic prospective. The results obtained are related to a lab-scale plant and thus no comparisons between industrial processes are possible, but the methodology we propose will improve the design of any process.

Keywords: Enriched air; LCA; PRO/II; lab-scale plant; eco-design; SimaPro 8.1.

1. Introduction

Processes involving air as an oxidizing agent are the most common in industrial chemistry (Franz, 2005). Considering oxidation reactions, 79 % of air contains inert compounds (mainly nitrogen) (Seinfeld and Wiley, 2006). Inert gases require larger apparatuses and more energy to heat them, thereby increasing costs (US Department of Energy, 1999). Oxygen-enriched air, i.e. air with a percentage of oxygen greater than 20.95 %, is a cost-reducing solution because it operates well with lower volume reactors (Gollan and Kleper, 1984).

Cryogenic distillation (Belaissaoui et al., 2014) and membrane separation of oxygen from nitrogen (Bernardo et al., 2009) are the current industrial processes for EA production. New less energy demanding technologies have been proposed in recent years, e.g. Eriksson and Kiros designed and built a portable device to produce EA which employs zeolite as an adsorbent and exploits the technology of pressure swing adsorption (Eriksson and Kiros, 2014) while Habib et al. optimized a hollow-fiber polymeric membrane and simulated a multi-stage unit capable to reach 91.4 % of oxygen with competitive energy consumption (Habib et al., 2017).

Manenti and Pirola published a patent (Manenti and Pirola, 2014a) and an article (Manenti and Pirola, 2014b) concerning a new process for the synthesis of EA. EA desorbs from water since oxygen has a higher solubility in this medium compared to nitrogen (Wilhelm et al., 1976). This method relies on Henry's Law, a thermodynamic equation which describes the solubility of gas in liquids in function of partial pressure and temperature. The lower the temperature and the higher the pressure, the greater the gas solubility. Therefore, EA can be extracted from any kind of water (seawater, tap water) by varying the operative parameters in order to decrease oxygen solubility. This new technology is interesting when it is coupled with a plant that recycles excess heat.

We also verified experimentally the process at the lab-scale. We set up and ran a plant for the continuous production of EA to show the feasibility of this new unit operation. Gathering early-stage data is the first step towards the scale-up of the process, which requires modelling and a rigorous optimization study (Dimian, 2003).

Engineers design chemical processes by minimizing the total annual costs of the plant (Towler and Sinnott, 2013). This analysis provides good results in terms of the process synthesis but lacks the environmental aspect. On the other hand, the LCA of a process focuses on environmental issues. Hetherington et al. (2014) suggest the

application of LCA to the early stage development of a process. However, eco-design could lead to unfeasible operative parameters, which in turn creates unwanted expenses. Thus, it is crucial to calculate the economic potential and the environmental impact of a process to balance costs and environment preservation. Kniel et al. (1996) combined environmental-economic analysis on existing plants, whose technology is well known and developed. As a case study, Park et al. (2016) studied the eco-design of the production of 7-aminocephalosporanic acid for carbohydrate waste using a 15 ton y⁻¹ production. Peuportier et al. (2013) applied LCA to energy efficient buildings to study their use phase impacts. This kind of assessment should be applied during the early-stage of the process scale-up to stress the economic and environmental hot spots. For example, Barton et al. applied LCA at the conceptual stage for technologies to assess the best available techniques in the sector of Integrated Pollution Prevention and Control (IPCC). He concluded that the use of LCA provided useful insight to the research program (Barton et al., 2002).

To face the lack of independent economic and environmental analysis typical of the chemical and environmental engineering fields respectively, we propose a new approach that considers the optimization of a lab-scale process in a holistic point of view, i.e. joining these aspects and obtaining optimal operative parameters. We studied a laboratory scale plant for the continuous EA production from these two aspects, i.e. applying an LCA analysis to the process and, simultaneously, calculating its economic potential using PRO/II, a steady state simulation software.

This work represents a first evaluation of the technology proposed. It is not possible at the moment to propose a similar LCA-economic assessment for the industrial EA production, due to the lack of consolidated and verified scheme of enriched air industrial processes (Piccinno et al., 2016).

2. Material and methods

2.1 Experimental plant

Fig. 1 reports the lab-scale plant flowsheet divided into the two main sections.

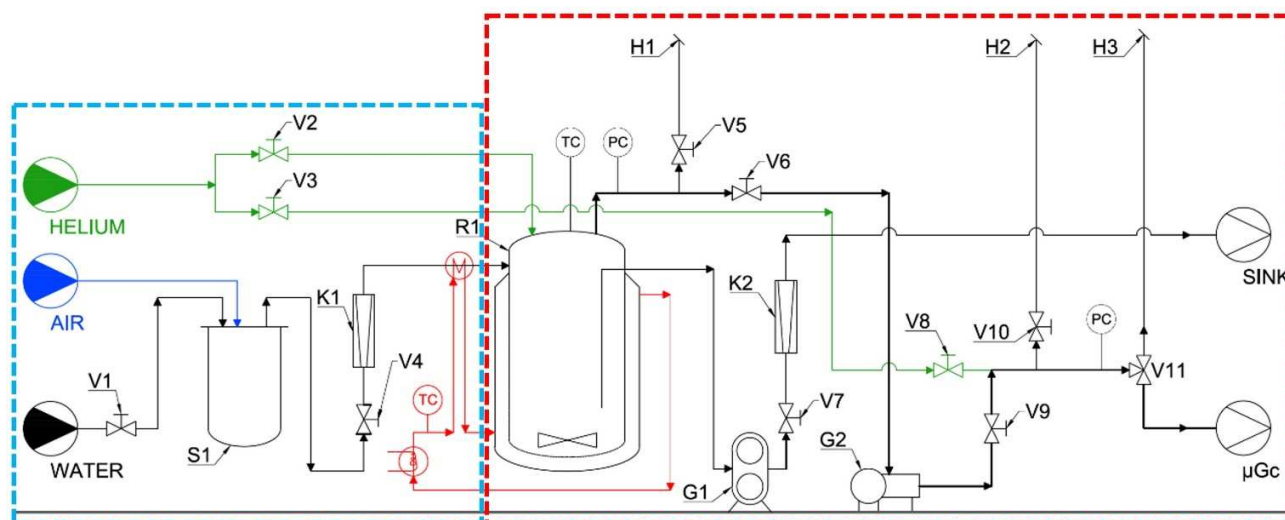


Figure 1: flowsheet of the experimental setup, V1-11: valves, S1: equilibrating vessel, R1: degasser, K1-2: liquid rotameters, G1: liquid pump, G2: vacuum pump, H1-3: purge. Blue dotted line indicates the water enrichment section while red dotted line the EA desorption one.

Before the start-up operation, helium purged all the units of desorption section. This line was never used again. Tap water equilibrated with compressed air (5 bar) in tank S1 at ambient conditions, i.e. 1.01 bar and 20 °C. This section guaranteed that oxygen and nitrogen concentrations reached equilibrium. An online portable model Hanna Instruments oximeter 9146, equipped with a probe (HI 76407/4F) monitored oxygen content in S1. Through a rubber pipe, water reached the degassing unit (R1). Valve (V4) regulated its flowrate, which was measured using a rotameter (K1). The degassing unit is a jacketed cylindrical glass container, 350 mm height and with a diameter of 145 mm, heated by hot water provided by a thermostat (Falc FA-90, mod SB5). A thermocouple (Pt-100 Delta Ohm, HD 9010) monitored the temperature inside R1. A peristaltic pump (G1, KNF CH-6210) withdrawn the degassed water, whose flowrate was measured by a second rotameter (K2). An Edward 2 Two stage pump generated vacuum, and a micrometric valve (V6) regulated it. A micro-GC Agilent 3000A analyzed the EA produced. It was equipped with a MOLSIEVE column, kept at 45°C, and a TCD detector. The line ended in a Ritter TG01/5 gas meter, that measured the amount of EA produced. We performed 25 experiments varying water inlet flow between 10 and 30 L h⁻¹ (set by a peristaltic pump), degassing pressure

between 600 mmHg and 400 mmHg and temperature between 28 °C and 63 °C. We kept the R1 pressure over 400 mmHg to avoid water boiling inside the unit. A peristaltic pump set water flowrate. R1 temperature was constrained because water was the thermostatic fluid. The plant ran for one year.

2.2 LCA analysis

We considered a “cradle-to-grave” life cycle analysis. The boundaries of the system include the manufacture of the plant, the transportation of the material, the production of oxygen-enriched air and plant disposal (Fig. 2). The location of the plant is Milan (Italy).

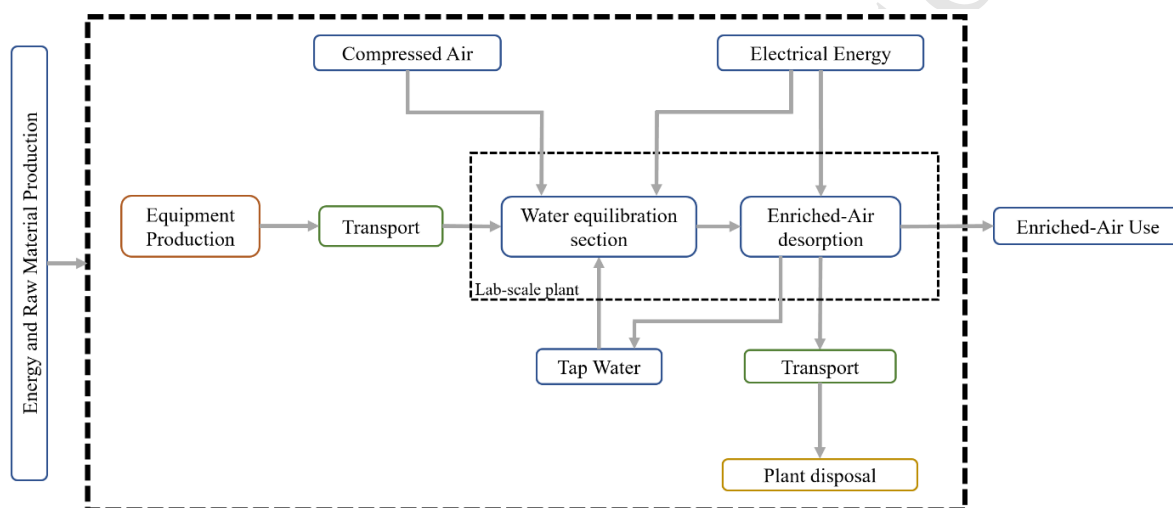


Figure 2: Scheme of the system boundaries of the LCA project.

Since the operative parameters influence EA production rate and composition, we chose the volume of EA produced in 24 hour of plant operation in Milan, Italy as the functional unit. Indeed, we adopted the Italian energetic mix in LCA calculations. We assumed a 20-years lifespan for the lab-scale plant and for the waste scenario. We considered the average recycling data of Northern Italy, i.e. assuming the average landfill, recycling and incineration percentage for the main constituents of the plant, glass (Assovetro, 2009), plastic (Eurostat, 2017) and metals (Giliberto, 2015). Moreover, we did not account for the environmental burden the helium purging may have caused, since we employed it only at the reactor start-up.

SimaPro 8.1.1.16 by Prè Consultants modeled the LCA study. We adopted Ecoinvent v3.1 and ELCD v3.1 libraries to account for the secondary data. ReCiPe Endpoint V 1.12 E/A evaluated the environmental impact.

We modeled EA production as depending on three main parameters, i.e. water flowrate, temperature and pressure. We varied these parameters and MatLab 2015b regressed the EA volume and the oxygen concentration with the following equation (Eq. 1):

$$f(F, T, P) = k_1 \cdot F + k_2 \cdot T + k_3 \cdot P + k_4 \cdot F \cdot T + k_5 \cdot F \cdot P + k_6 \cdot T \cdot P + k_7 \cdot F \cdot T \cdot P \quad (1)$$

Where k_i are the adjustable variables calculated by MatLab built-in nonlinear regressions routine and F , T and P are the three main parameters chosen. We ran the same regression considering the EA price as calculated function (see Section 2.3).

A voltmeter-ammeter measured the power consumption of each instrument. After the plant reached the stationary conditions, we carried out these measurements for 3 h to correlate the power consumption with the operative parameters.

We modeled the dependence of the electrical consumption with a second order polynomial of T (Eq.2).

$$f(T) = a \cdot T^2 + b \cdot T + c \quad (2)$$

where a - c are the adjustable parameters and T the operative temperature

We weighed all the plant parts. In SimaPro, the plant was divided into two sections: the water equilibration with atmospheric air and the enriched air desorption (Fig. 1).

Table 1: summary of the materials constituting the lab-scale plant

Water equilibration section		
Material	Mass [kg]	Comments
Steel, unalloyed	1.244	Steel constituent pipe and valves
Rubber	0.284	Connection pipes
Glass tube	0.300	Rotameter glass cylinder
Polypropylene	1.321	Water equilibrating tank
Enriched air desorption		

Material	Mass [kg]	Comments
Steel, unalloyed	2.739	Steel constituent pipe and valves
Rubber	0.474	Connection pipes
Teflon	5.461	Teflon constituent pipe and gaskets
Polyurethane	0.544	Thermal insulation pipe
Silicone	0.028	Gaskets
Iron	0.008	Magnetic stirrer

We collected the primary data several times to calculate the standard deviation. For instruments, e.g. pumps and thermostat, we used the INPUT-OUTPUT database available in SimaPro (Input Output\USA 2002). We entered the actualized economic value for these instruments. We considered a lognormal distribution of the transportation distance of the plant's parts with a SD of 2 (Goedkoop et al., 2016). We accounted for the transportation of all plant parts from the manufacturer to the laboratory facility and the transportation to the disposal site (Fig. 2). We tested 30 scenarios (Table 2) to identify the best parameter sets that minimize the environmental impact and performed a Monte Carlo simulation for the uncertainty analysis (Hung and Ma, 2009).

Table 2: parameters for each scenario

Parameter scenario	Water flowrate [Lh ⁻¹]	Temperature [°C]	Pressure [mmHg]	Parameter scenario	Water flowrate [Lh ⁻¹]	Temperature [°C]	Pressure [mmHg]
1	10	20	350	16	20	20	350
2	10	30	450	17	20	30	450
3	10	40	550	18	20	40	550
4	10	50	350	19	20	50	350

5	10	60	450	20	20	60	450
6	10	20	550	21	30	20	550
7	10	30	350	22	30	30	350
8	10	40	450	23	30	40	450
9	10	50	550	24	30	50	550
10	10	60	350	25	30	60	350
11	20	20	450	26	30	20	450
12	20	30	550	27	30	30	550
13	20	40	350	28	30	40	350
14	20	50	450	29	30	50	450
15	20	60	550	30	30	60	550

2.3 Economic analysis

Tank and degassing units are modeled as flash unit operations. Operative conditions of these two units are set using experimental temperatures and pressures. Henry's law calculated the solubility of nitrogen and oxygen in water. NRTL model estimated the activity of oxygen and nitrogen in water phase. We expressed Henry's constants as function of temperature (Eq. 3)

$$\ln(H) = C_1 + \frac{C_2}{T} + C_3 \ln T \quad (3)$$

whose coefficients are reported in Table 3 for N₂ and O₂ in water.

Table 3 Parameters used to compute Henry's constants (databank: PROII_9.3)

	T _{min} [K]	T _{max} [K]	P _{min} [kPa]	P _{max} [kPa]	C ₁ [-]	C ₂ [K]	C ₃ [-]
Oxygen	200	500	1	10000	155.5533	-7442.29	-20.2359
Nitrogen	200	500	1	10000	158.2643	-7260.14	-20.7005

Capital costs (CAPEX) are the ones of the equipment, i.e. degasser and pumps (Supplementary material, Table S1). Operating costs (OPEX) include utilities and consumables like tap water, electricity and compressed air (Guthrie, 1974, 1969). We calculated the price of EA by assuming that the plant will last 20 years and have a depreciation time of 9.5 years. Eq. 1 correlated the price with the three operative parameters. We reported a detailed description of the model elsewhere (Galli et al., 2017). Refer to supplementary material for all the equations parameters (Table S2).

3. Results

The lab-scale plant successfully produced EA (Figure 3a-b).

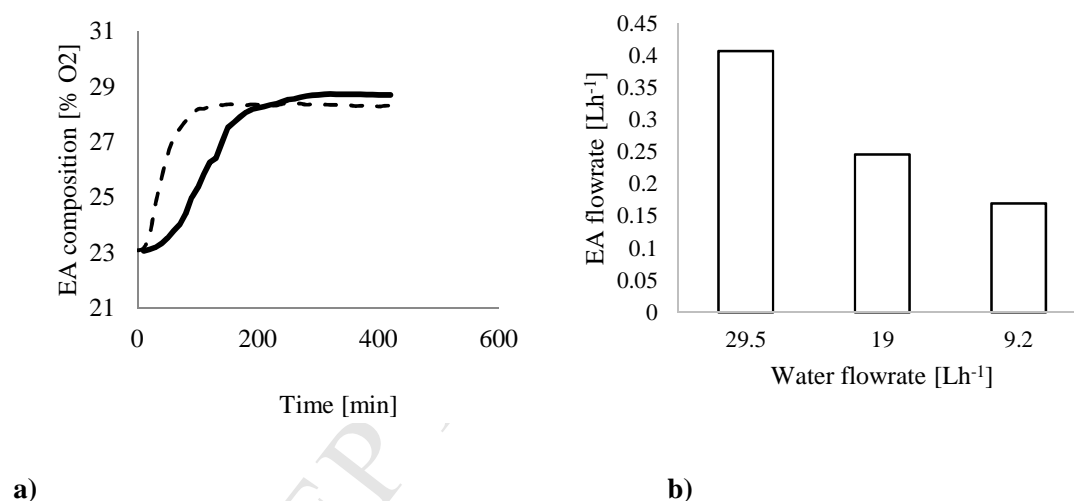


Figure 3: experimental a) EA oxygen composition at different pressures, 500 mmHg (dotted line) and 300 mmHg (full line) and b) EA flowrate at different inlet flowrates (data obtained at $T=50\text{ }^{\circ}\text{C}$ and $P=300\text{ mmHg}$)

Table 4 reports the values of k for Eq. 1. Only S1 temperature influences electrical power consumption. The optimum adjustable values for Eq. 2, are $a=0.14\text{ Wh}^{\circ}\text{C}^{-2}$, $b=-3.90\text{ Wh}^{\circ}\text{C}^{-1}$, $c=1036.5\text{ Wh}$. We inserted these values in the SimaPro model to evaluate the environmental impacts of the production process. The volumes of EA produced after 24 h of operation (functional unit) in each scenario are reported in the Supplementary material (Table S3).

Table 4: K values, Eq. 1

	k_1	k_2	k_3	k_4	k_5	k_6	k_7
EA oxygen Molar fraction [-]	6.09E-01 [L^{-1}]	4.46E-02 [$^{\circ}C^{-1}$]	4.60E-01 [$torr^{-1}$]	-1.29E-03 [$L^{-1}^{\circ}C^{-1}$]	-1.29E-02 [$L^{-1}torr^{-1}$]	-6.70E-04 [$torr^{-1}^{\circ}C^{-1}$]	2.73E-05 [$L^{-1}torr^{-1}^{\circ}C^{-1}$]
EA volume [L]	6.25E-03 [-]	8.98E-05 [$L^{\circ}C^{-1}$]	1.14E-03 [$Ltorr^{-1}$]	-1.30E-05 [$^{\circ}C^{-1}$]	-2.62E-04 [torr $^{-1}$]	-6.27E-06 [$Ltorr^{-1}^{\circ}C^{-1}$]	8.10E-07 [$torr^{-1}^{\circ}C^{-1}$]
EA price [EUR]	6.20E-03 [$EUR L^{-1}$]	3.70E-04 [$EUR^{\circ}C^{-1}$]	4.15E-03 [$EUR torr^{-1}$]	-1.19E-05 [$EUR L^{-1}^{\circ}C^{-1}$]	-1.19E-04 [$EUR L^{-1} torr^{-1}$]	-7.98E-06 [$EUR torr^{-1}^{\circ}C^{-1}$]	2.55E-07 [$EUR L^{-1} torr^{-1}^{\circ}C^{-1}$]

4. Discussion

Environmental impact depends on operating temperature. The higher the temperature, the greater the impact (Fig. 4) since the plant's need for electricity was exclusively for heating. The treatment of waste water also contributes to the environmental impact but to a lower degree.

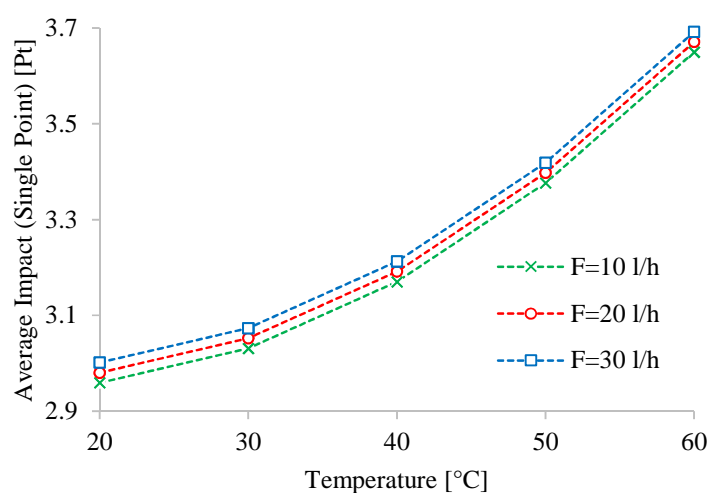


Figure 4 Environmental impact of lab-scale plant in function of temperature and water flowrate

Our environmental and economical results (Fig. 5) show the single score impact points (calculated with the Europe ReCiPe E/A Endpoint method) together with the uncertainty (calculated by Monte Carlo analysis) and the simple moving average (step 3) of EA price.

The Europe ReCiPe E/A method considers long-term ecological effects and is based on precautionary principle thinking. The single score (Fig. 5) evaluates the environmental impact under three aspects: human health, ecosystems and resource depletion.

Even if we cannot apply these results to larger EA production plants, the proposed methodology could be applied to any other process at the R&D stage.

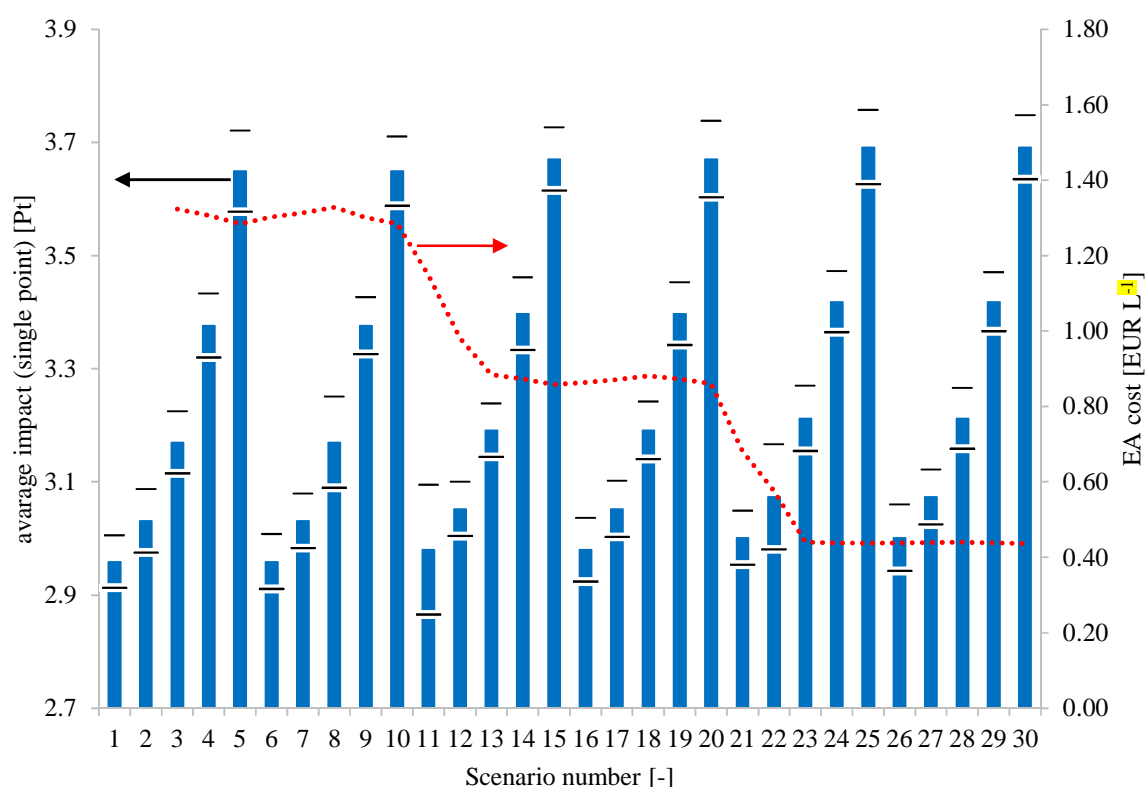


Figure 5: Economic and environmental results. Average impact (bars, single point with ReCiPe Endpoint E/A) with respective uncertainty, calculated by Monte Carlo analysis, and [-] average EA price per liter.

The best scenario, only considering LCA, is the first ($T=20\text{ }^{\circ}\text{C}$, $F=10\text{ Lh}^{-1}$ and $P=350\text{ mmHg}$). Another parameter that influences the final impact is the water flowrate. This could be noticed by the different impact between the scenarios with the same temperature and pressure but different water flowrate (for example 4 and 24). Pressure influences the quantity of EA produced and does not affect the environment. Monte Carlo analysis revealed that scenarios calculated at 20°C and at 30°C are not significantly different. Economic analysis shows that EA price depends mainly on water flowrate, because at higher flowrate, a higher amount of EA is produced. The best operative parameters for what concerns the economic evaluations are scenarios 23-30. Temperature and pressure do not influence the costs significantly because electricity (OPEX) is inexpensive compared to capital expenses. Scenario 26 is the best when we consider the economic and environmental aspects.

We report the midpoint categories of scenario 26 in Fig. 6.

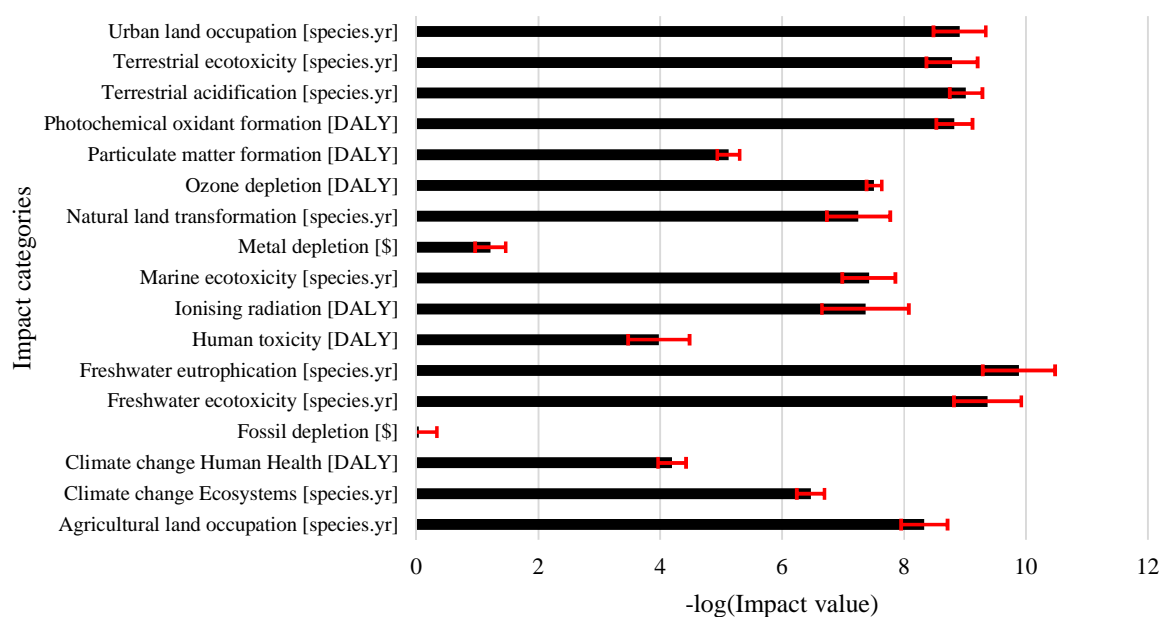


Figure 6: Midpoint impact results of the LCA analysis performed with the parameters of scenario 26 (water flowrate = 30 Lh^{-1} , $T=20\text{ }^{\circ}\text{C}$ and $P=450\text{ mmHg}$). The X axis is a negative logarithm, i.e. the higher the value, the lower the impact.

The highest impact category is that of fossil depletion in which electricity (low voltage) accounts for 84 %. This high electric consumption is typical of a lab-scale plant and is not comparable to any industrial scale data, where

the main heating medium is steam. On a larger scale plant, we expect the impacts of metal and fossil fuel depletion to decrease since higher volume per unit operation are achieved and heat recovery units are implemented.

The land consumption, together with terrestrial and water pollution are negligible. Freshwater contamination categories are not giving the highest impact since water acts as an absorbent and it does not need to be treated at the end of the process. The weight of the impact categories was similar for all scenarios. Fossil and metal depletions were the most important.

5. Conclusion

In this work, the environmental and economic evaluation of an innovative production process of oxygen-enriched air was performed using two different commercial software, SimaPro 8.1 and PRO/II 9.3. Even though the proposed technology is not industrial-grade, significant results on the assessment methodology could be extrapolated. The results obtained using the two methods, independently, gave different optimal operative conditions. Compared to the economic impact only, the combined optimization leads to a single point impact reduction of 19 % (from 3.69 to 3.00 Pt). On the other hand, considering only the environmental burden, we design a process whose costs are 350 % greater with respect to the eco-economic one.

Any other process can be improved with this new methodology and we recommend the application of this approach at the R&D stage to have a direct and immediate idea of the best process variables to user to avoid environmental and economic hot spots. Low pressures, temperatures and high water flowrates are the best design parameters for the production of EA.

6. Acknowledgement

The authors warmly thank SimSci-Schneider Electrics for the academic license concession of the software PRO/II and Dr. Cristina Peretti for the technical support in the simulations. The work was partially financed by the project “Azione A del Dipartimento di Chimica per il Piano di Sostegno alla Ricerca – 2015/2017 - Linea 2”

by the Dipartimento di Chimica, Università degli Studi di Milano. We thank Mr. Nicolas Patience for reviewing the English of the paper.

References

- Assovetro, 2009. Glass collection and recycle. <http://www.assovetro.it/pagina.php?art=25> (accessed 17.7.17).
- Barton, J.R., Schneider, A., Jager, J., 2002. Role of LCA in the design of research and development (R&D) of novel processes subject to IPPC and BAT. *Int. J. Life Cycle Assess.* 7, 11–17.
- Belaissaoui, B., Le Moullec, Y., Hagi, H., Favre, E., 2014. Energy efficiency of oxygen enriched air production technologies: Cryogeny vs membranes. *Energy Procedia* 63, 497–503.
- Bernardo, P., Drioli, E., Golemme, G., 2009. Membrane gas separation: a review/state of the art. *Ind. Eng. Chem. Res.* 48, 4638–4663.
- Dimian, A.D., 2003. *Integrated Design and Simulation of Chemical Processes*, second ed. Igarss. Elsevier, Amsterdam.
- Eriksson, T., Kiros, Y., 2014. Temperature swing adsorption device for oxygen-enriched air. *J. Clean. Prod.* 76, 174–179.
- Eurostat, 2017. Packaging waste statistics. http://ec.europa.eu/eurostat/statistics-explained/index.php/Packaging_waste_statistics (accessed 17.7.17).
- Franz, G., 2005. Oxidation, in: Ullman, F., Elvers, B. (Eds.), *Ullman's Encyclopedia of Industrial Chemistry*. Wiley-VCH. Weinheim, pp. 1-57.
- Galli, F., Comazzi, A., Previtali, D., Manenti, F., Bozzano, G., Bianchi, C.L., Pirola, C., 2017. Production of oxygen-enriched air via desorption from water: Experimental data, simulations and economic assessment. *Comput. Chem. Eng.* 102, 11–16.

- Giliberto, J., 2015. Italy's recycling industry. <http://www.italy24.ilsole24ore.com/art/business-and-economy/2015-12-15/riciclo-rifiuti-191337.php?uuid=ACRMI8tB> (accessed 17.7.17).
- Gollan, A., Kleper, M., 1984. The economics of oxygen enriched air production via membranes. IETC - Ind. Energy Technol. Conf. 1, 298–306.
- Guthrie, K.M., 1974. Process Plant Estimating, Evaluation and Control, ed. Craftsman, Solana Beach.
- Guthrie, K.M., 1969. Capital cost estimating. Chem. Eng. 76, 206–253.
- Habib, M.A., Nemitallah, M.A., Afaneh, D., Mezghani, K., 2017. Characteristic of air separation in hollow-fiber polymeric membrane for oxygen enriched air clean combustion applications. J. Clean. Prod. 143, 960–972.
- Hetherington, A.C., Borrion, A.L., Griffiths, O.G., McManus, M.C., 2014. Use of LCA as a development tool within early research: Challenges and issues across different sectors. Int. J. Life Cycle Assess. 19, 130–143.
- Hung, M.L., Ma, H.W., 2009. Quantifying system uncertainty of life cycle assessment based on Monte Carlo simulation. Int. J. Life Cycle Assess. 14, 19–27.
- Kniel, G.E., Delmarco, K., Petrie, J.G., 1996. Life cycle assessment applied to process design: Environmental and economic analysis and optimization of a nitric acid plant. Environ. Prog. 15, 221–228.
- Manenti, F., Pirola, C., 2014a. Process for the enrichment of air. WO2014/161713 A1.
- Manenti, F., Pirola, C., 2014b. Process intensification using energy-free highly enriched air: Application to seawater desalination plants. Chem. Eng. Process. Process Intensif. 79, 40–47.
- Park, C., Heo, K., Oh, S., Kim, S.B., Lee, S.H., Kim, Y.H., Kim, Y., Lee, J., Han, S.O., Lee, S.-W., Kim, S.W., 2016. Eco-design and evaluation for production of 7-aminocephalosporanic acid from carbohydrate wastes discharged after microalgae-based biodiesel production. J. Clean. Prod. 133, 511–517.
- Peuportier, B., Thiers, S., Guiavarch, A., 2013. Eco-design of buildings using thermal simulation and life cycle assessment. J. Clean. Prod. 39, 73–78.

- Piccinno, F., Hischer, R., Seeger, S., Som, C., 2016. From laboratory to industrial scale: a scale-up framework for chemical processes in life cycle assessment studies. *J. Clean. Prod.* 135, 1085–1097.
- M. Goedkoop, M. Oele, M. Vieira, J. Leijting, T. Ponsioen, E. Meijer, 2016. SimaPro Tutorial. <https://www.pre-sustainability.com/download/SimaPro8Tutorial.pdf> (accessed 18.7.17)
- Seinfeld, J.H., Pandis, S.N., 2006. *Atmospheric chemistry and physics*, second. ed. Wiley, Hoboken.
- Towler, G., Sinnott, R., 2013. *Chemical Engineering Design - Principles, Practice and Economics of Plant and Process Design*, second ed. Elsevier, Waltham.
- US Department of Energy, 1999. *Industrial Combustion Technology Roadmap*, .
- Wilhelm, E., Battino, R., Wilcock, R.J., 1976. Low-Pressure Solubility of Gases in Liquid Water. *Chem. Rev.* 77, 219–262.

Eco design LCA of an innovative lab scale plant for the production of oxygen-enriched air. Comparison between economic and environmental assessment

Federico Galli^a, Carlo Pirola^b, Daniele Previtali^b, Flavio Manenti^c, Claudia L Bianchi^b

^a École Polytechnique de Montréal, Department of Chemical Engineering, Boulevard Edouard Montpetit, H3C 3A7 Montreal, QC, CANADA

^b Università degli Studi di Milano, Dipartimento di Chimica, via Golgi 19, 20133, Milano, ITALY

^c Politecnico di Milano, Dipartimento di Chimica, Materiali e Ingegneria Chimica "Giulio Natta", Piazza Leonardo da Vinci 32, 20133, Milano, ITALY

*corresponding author: federico.galli@polymtl.ca

- Oxygen enriched air was obtained by water degassing using a lab-scale plant
- Lab-scale plant LCA analysis and economic assessment were performed
- Economic and environmental optimization give different optimum parameters
- The best eco-economical operating parameters were individuated